


Exposed portion of wall should have above grade waterproofing to prevent water from entering through wall face or construction joints and traveling down behind Paraseal

Continuous paratarm bar nailed every 8" O.C.

Permanent Seam Tape at all vertical seams down to 18" below finish grade of any seam not orientated to shed water

Superstop install 2" in from outer face of wall

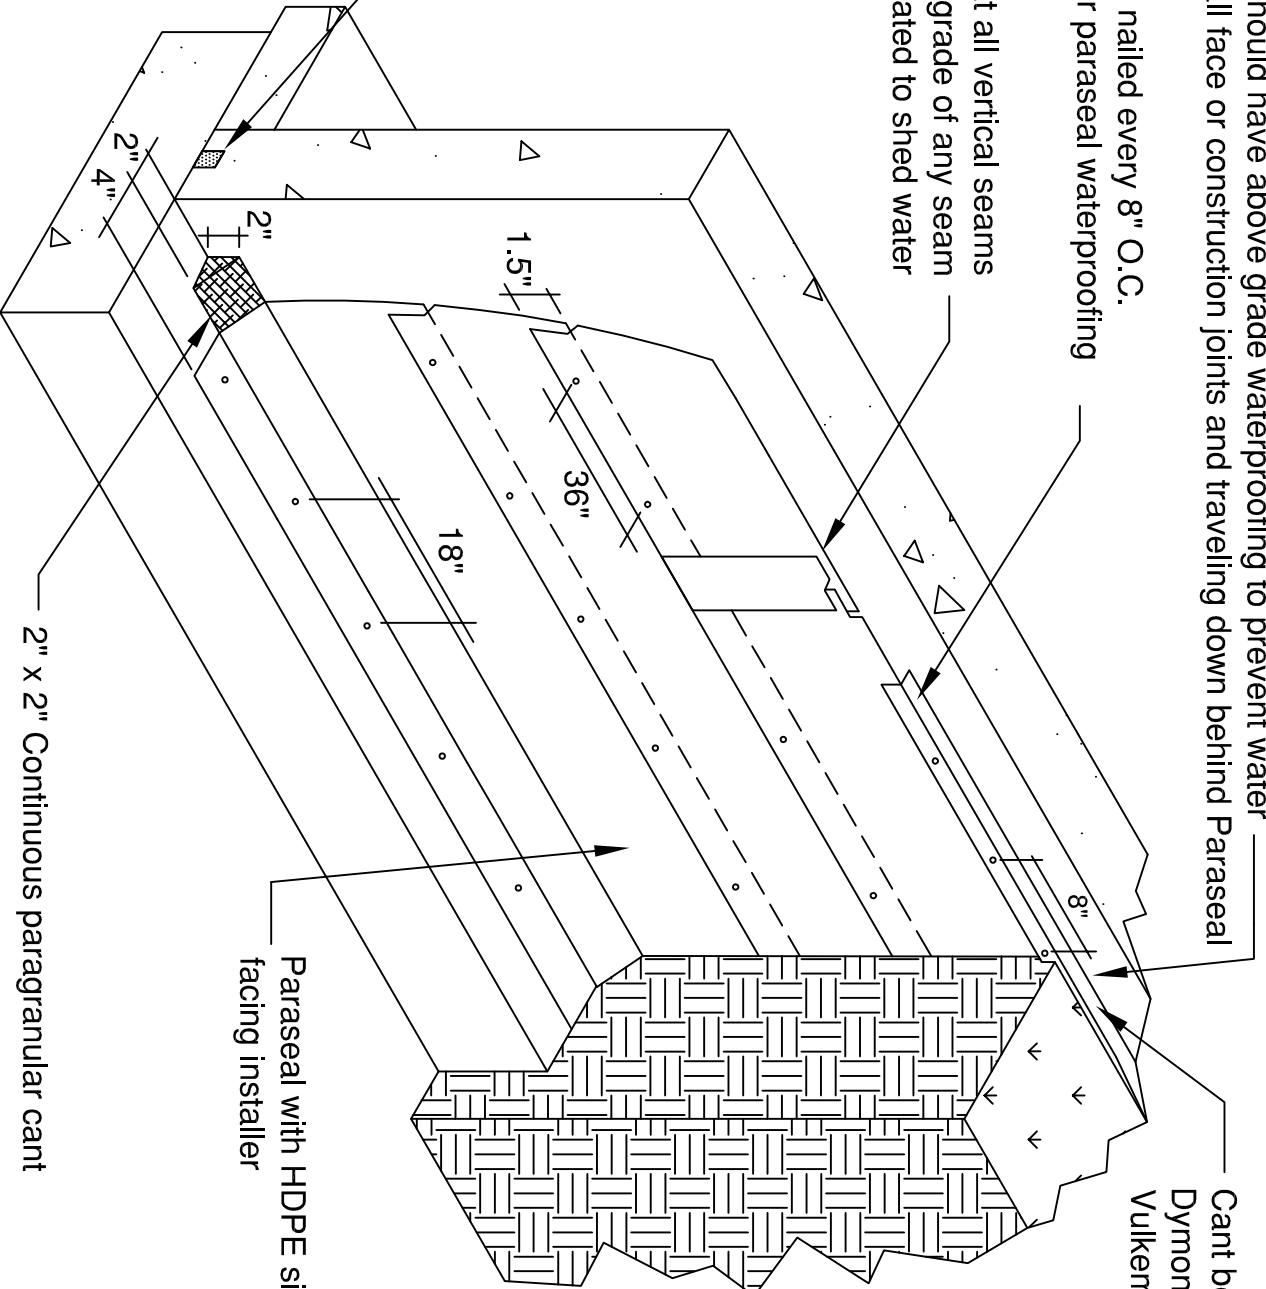

Cant bead of Dymonic 100 or Vulkem 1116

Paraseal with HDPE side facing installer

2" x 2" Continuous paragrangular cant

Note: Paraseal products require a minimum 24 psf compaction/ confinement to be effective.

This detail is intended for conceptual purposes only. Detail must be reviewed by a project/design professional. See www.tremcosealants.com for the most up-to-date product information.

Rev	Date	Description	By
1	10/10/2013	Update Detail	KAB